

GASO.LINE

Canon 105mm LG-1 Mk.II



CARACTERISTIQUES TECHNIQUES

L'obusier LG1 est une pièce d'artillerie tractée de 105 mm mise en service à partir de 1992 et dont les principales caractéristiques sont son faible poids et sa grande précision à grande distance. Sa construction légère donne au canon une durée de vie relativement courte. Le nombre de coups estimé avant changement du canon est d'environ 7500 en théorie ; cependant, dans la pratique, le seuil est plutôt autour de 1500. Le canon a été spécifiquement étudié en vue d'une utilisation par les forces de déploiement rapide avec pour conséquence la priorité donnée à la rusticité, la facilité d'emploi et le poids réduit. Il peut tirer toutes les munitions standard de l'OTAN de 105 mm, pour une portée pouvant atteindre 18,5 km à 19,5 km avec les obus HE-ER G2 et US M913.

TECHNICAL CHARACTERISTICS

The LG1 howitzer is a piece of artillery towed of 105 mm in service from 1992 and whose main features are its weak weight and its good precision to big distance. Its construction light to the cannon a relatively short life span. The number of strokes valued before change of the cannon is of about 7500 in theory; however, in the practice, the doorstep is rather around 1500. The cannon has specifically been studied in view of an use by the strengths of fast spreading with for consequence the priority given to the rusticity, the easiness of employment and the weight reduces. It can pull all munitions standard of the NATO of 105 mm, for a range capable to reach 18,5 km to 19,5 km with the shells HEY-ER G2 and US M913.



Ce modèle est fabriqué par **Gaso.line**




10, passage du charolais 75012 Paris France




Tél./Phone: (33) 01.44.75.01.61 Fax: (33) 01.44.75.01.16

E-mail: info@quarter-kit.com Web site: www.quarter-kit.com



Nomenclature GAS50210
Canon LG-1 Mk.II

	Désignation	Qté
1	Canon	1
2	Affût canon	1
3	Flèche droite	1
4	Flèche gauche	1
5	Embase	1
6	Etrier	1
7	Calculateur de tir	1
8	Frein de bouche	1
9	Embase canon	1
10	Roue	2
11	Vérin	1
12	Système remorquage	1
13	Support roue gauche	1
14	Support roue droite	1
15	Volant A	1
16	Batterie	1
17	Feux gauche	1
18	Feux droit	1
19	Support calculateur	1
20	Guide vérin	1
21	Frein à main	1
22	Piston flèche	2
23	Vérin A	1
24	Photo-découpe	1
25	Support embase	1
26	Vérin flèche A	1
27	Vérin flèche B	1
28	Crochet de fermeture	1
29	Volant B	1
30	Tige ø 0.7 x 80 mm	1
31	Tige ø 0.5 x 30 mm	1
32	Tige ø 1 x 20 mm	1
33	Fil métal ø 0.2 x 200 mm	1

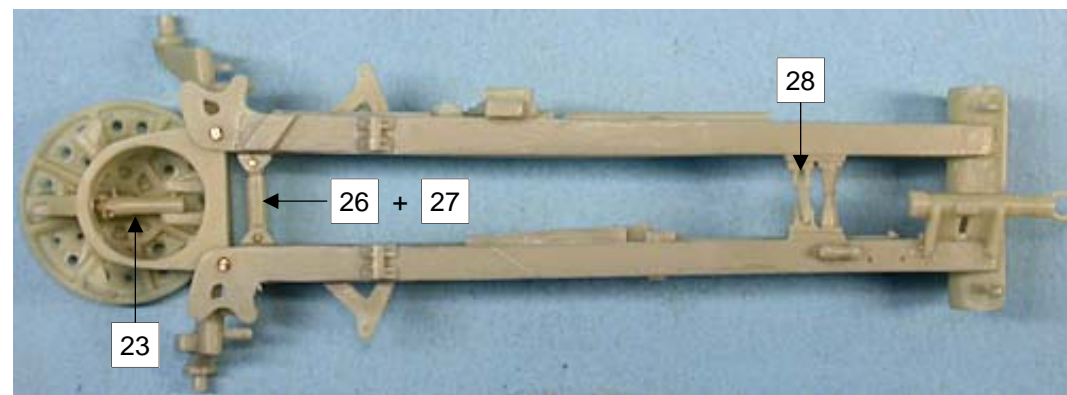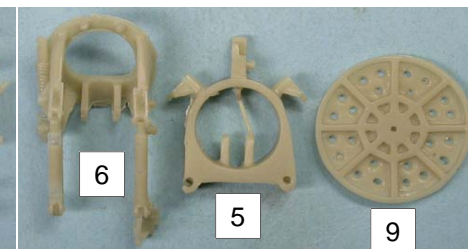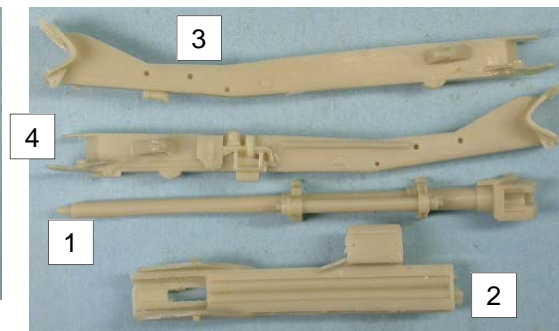

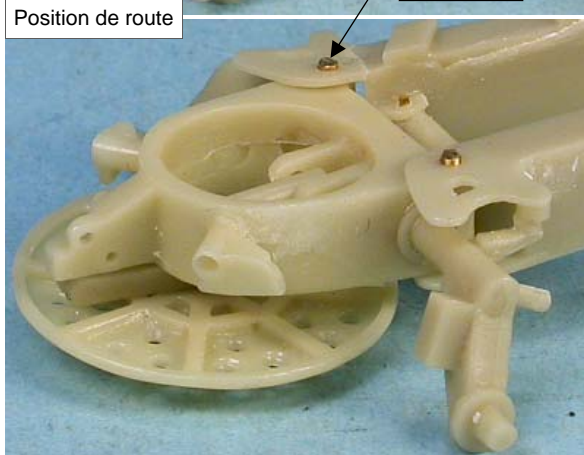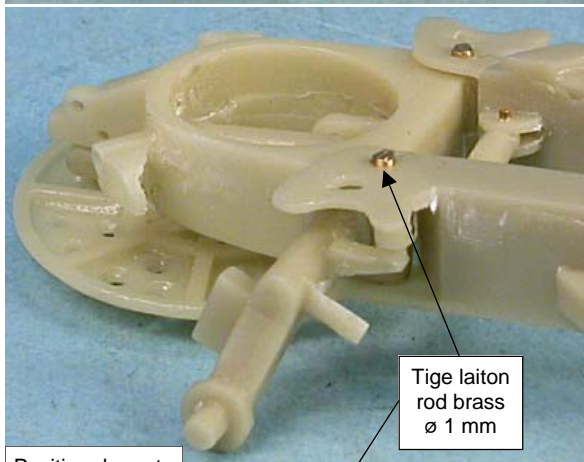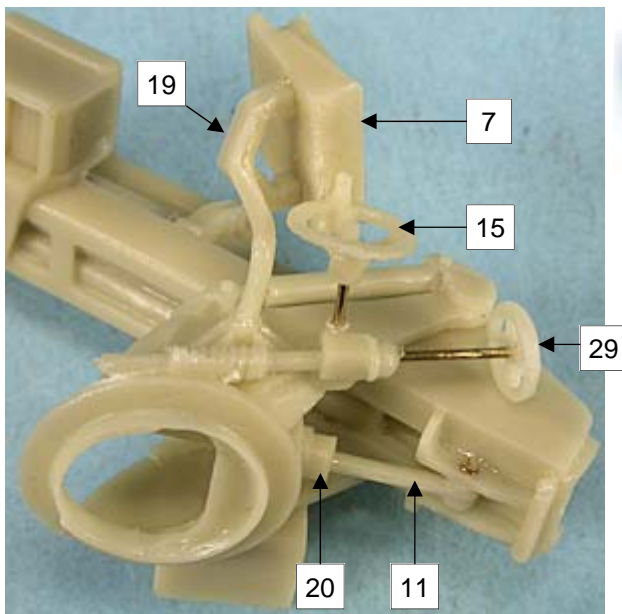

Tige laiton / rod brass ø 0.7 mm

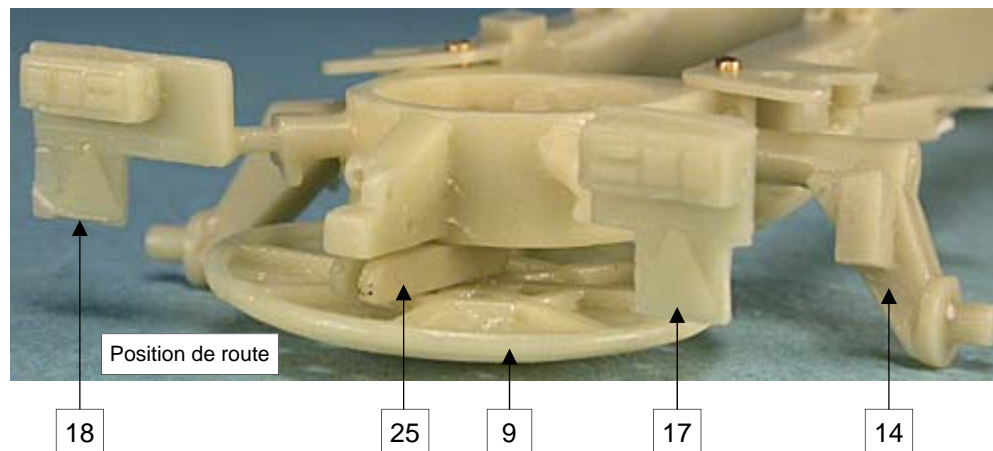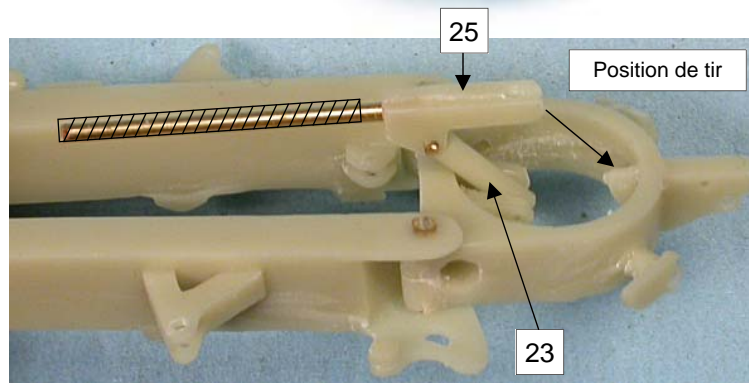

Position de route

